

product specification

GX1295

12 inch Coaxial Loudspeaker

*tq*install™
SERIES



Overview

The GX1295 is a coaxial loudspeaker that provides the output capability and pattern control of a conventional premium 2-way system, but with the directional consistency and crisp transient response that only a coaxial transducer can provide. Its single-ceramic-magnet coaxial transducer and 90° x 45° horn can be rotated in 45° increments, which allows its coverage to be tailored to an application's requirements. The compact enclosure's 40° trapezoidal angle allows it to be mounted near walls or ceilings with minimal effect on sight lines, and provides the ideal angle for tight-packed arrays when the coax is rotated 90 degrees.

Fulcrum Acoustic's **TQ™** processing is an integral part of the GX1295 design. Sound, innovative acoustical design combined with state of the art digital processing leads to exceptional clarity and precise transient response, even at very high sound pressure levels. The required digital signal processing can be provided by one of many supported platforms.

The GX1295 is particularly effective in systems where targeted pattern control is desirable, and is an excellent solution for high fidelity, foreground distributed systems. Its neat appearance and familiar format facilitates acceptance by interior designers and architects. This makes it the perfect choice for houses of worship, theaters, restaurants, transportation facilities, theme parks, and more.

Performance Specifications¹

Operating Mode

Single-amplified w/ DSP

Operating Range²

49 Hz to 20 kHz

Nominal Beamwidth (rotatable)

90° x 45°

Transducers

HF/LF: Coaxial 3.0" titanium diaphragm compression driver; 12.0" woofer, 3.0" voice coil; single ceramic magnet

Power Handling @ Nominal Impedance³

57 V / 400 W @ 8 Ω

Nominal Sensitivity @ Input Voltage⁴ (whole space)

103 dB @ 2.83 V

Nominal Maximum SPL (peak / continuous)

135 dB / 129 dB

Equalized Sensitivity @ Input Voltage⁵

97 dB @ 2.83 V

Equalized Maximum SPL⁶ (peak / continuous)

129 dB / 123 dB

Recommended Power Amplifier

400 W to 800 W @ 8 Ω

Physical Specifications

Connections

(2) Neutrik NL4 Speakon

Pin 1+/-: Full Range

Pin 2+/-: NC

Mounting / Suspension Points

(12) M10 x 1.5 eye bolt angle points, (2) M10 x 1.5 yoke points, (1) M10 x 1.5 pull back point

Dimensions / Weight

See page 5

Finish

Black painted enclosure w/ matte black grille, or
White painted enclosure w/ matte white grille

Options


YK-GX12 yoke bracket, Terminal strip input, Custom color finish, Weather-resistant (WR) enclosure & hardware




fulcrum
ACOUSTIC®

product specification


Axial Sensitivity (dB SPL, 2.83 V @ 1 m)^{7,8}

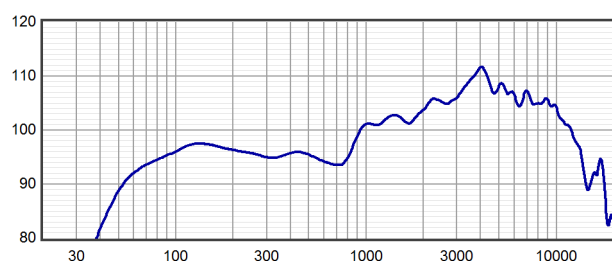


Horizontal Off Axis Response^{7,11}

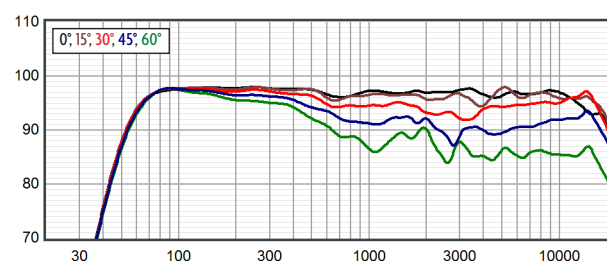


Axial Processed Response (dB)^{7,9}

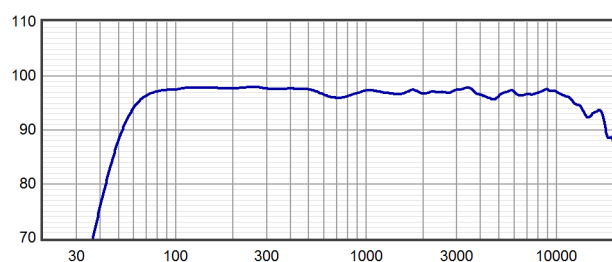


Vertical Off Axis Response^{7,11}

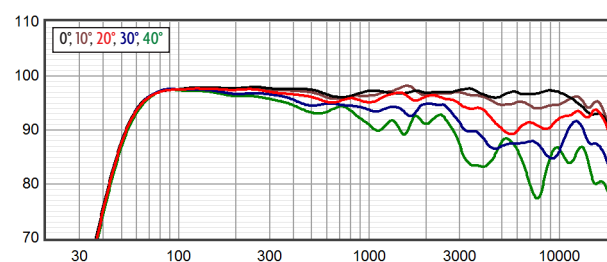


Axial Processed Phase Response (degrees)^{7,10}

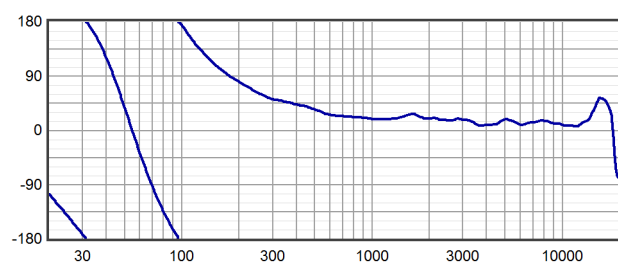


Beamwidth^{7,12}

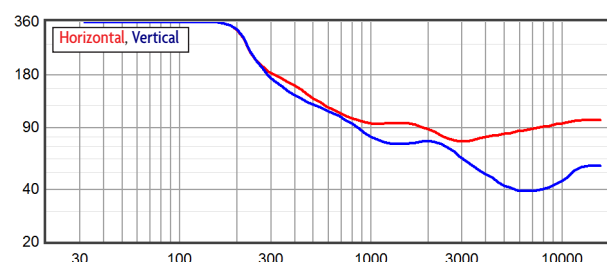

Impedance (ohms)

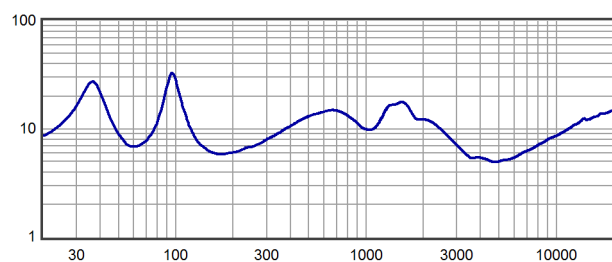

Directivity Index (dB)¹³

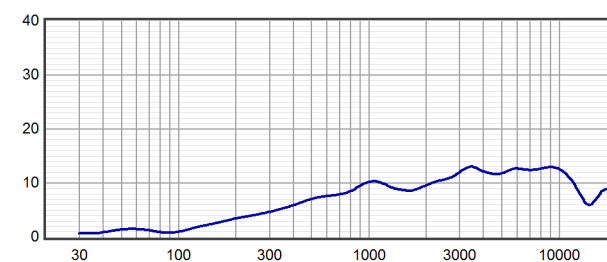




fulcrum
ACOUSTIC®


product specification

Horizontal Polar Response (30 dB Scale, 6 dB per Major Division)


100 Hz
125 Hz
160 Hz
200 Hz

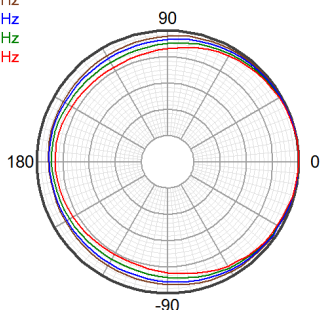


250 Hz
315 Hz
400 Hz
500 Hz

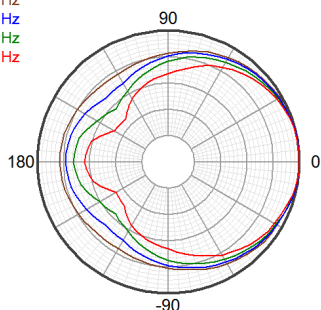


630 Hz
800 Hz
1000 Hz
1250 Hz

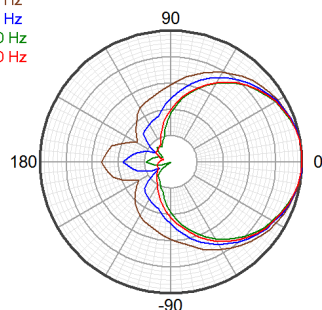


1600 Hz
2000 Hz
2500 Hz
3150 Hz

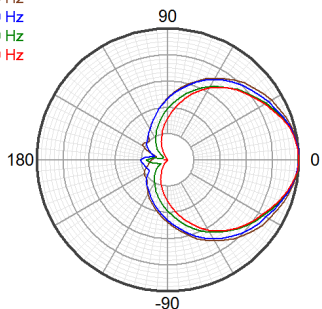

4000 Hz
5000 Hz
6300 Hz
8000 Hz

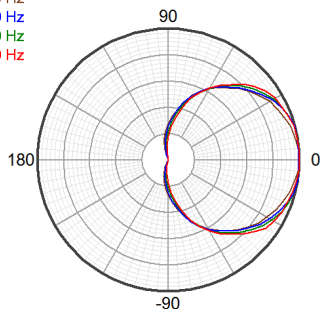


10000 Hz
12500 Hz
16000 Hz
20000 Hz

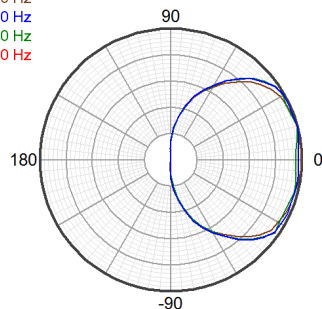


Vertical Polar Response (30 dB Scale, 6 dB per Major Division)


100 Hz
125 Hz
160 Hz
200 Hz

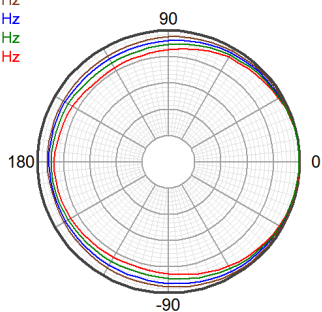


250 Hz
315 Hz
400 Hz
500 Hz

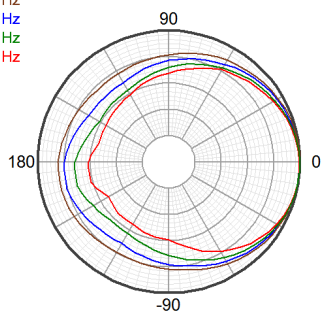


630 Hz
800 Hz
1000 Hz
1250 Hz

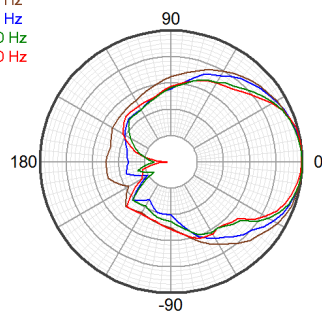


1600 Hz
2000 Hz
2500 Hz
3150 Hz

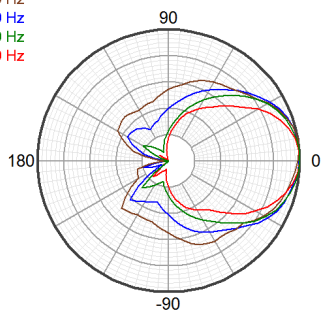

4000 Hz
5000 Hz
6300 Hz
8000 Hz

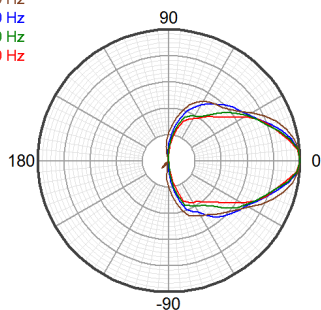

10000 Hz
12500 Hz
16000 Hz
20000 Hz

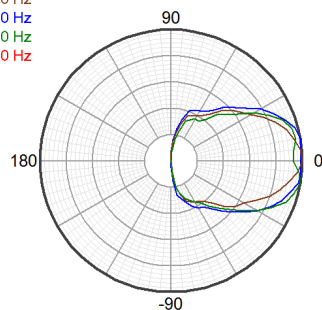

Technologies

The proprietary horns employed in the GX Series represent a modern digital-signal-processing-aware update to the traditional horn-loaded coaxial loudspeaker concept. The well-known benefits of the coaxial approach have been realized without the familiar shortcomings of historical designs. Fulcrum Acoustic's **Temporal Equalization™ (TQ™)** digital signal processing techniques eliminate midrange colorations and high frequency harshness while producing a smooth, seamless coverage pattern through the crossover range. In fact, the coaxial transducers were designed from the ground up to take advantage of the unique capabilities of TQ™.


The coaxial transducer in the GX1295 includes a 3 inch diaphragm compression driver. The large diaphragm area permits the compression driver to operate at frequencies too low for smaller

compression drivers to handle. This allows the high frequency horn to smooth the polar response of the low frequency section in the frequency range where the horn would otherwise cause shadowing. It also allows the compression driver to produce extreme sound pressure levels with an effortless sonic character.

The coaxial woofer's large radiating surface works in conjunction with the HF horn to improve directional control at the bottom of the horn's operating range, increasing directional control beyond what can be accomplished by the horn alone. The coaxial transducer's single-ceramic-magnet, dual-gap geometry not only minimizes cost and weight; it also allows very tight spacing between the compression driver and woofer voice coils. The delay between the driver outputs is thereby minimized, which allows the coaxial device to work well with a passive crossover.

Connection Diagram

2-way, Single-Amp

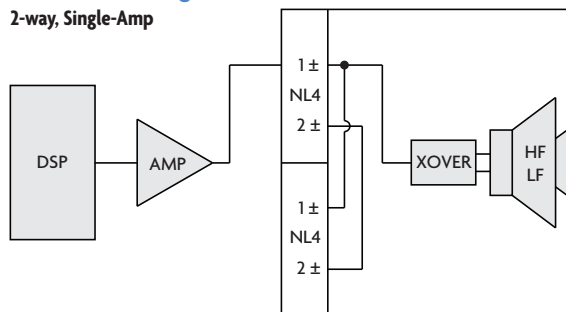

Mechanical Specification Drawings

2D and 3D DWG dimensional drawings are available for download at www.fulcrum-acoustic.com/support.


Notes

- ¹ **Performance Specifications** All acoustic specifications rounded to nearest whole number. External DSP with Fulcrum Acoustic-provided settings is required to achieve the specified performance.
- ² **Operating Range** The frequency range within which the processed response is within 10 dB of the average.
- ³ **Power Handling** Based on the AES power handling of the transducers.
- ⁴ **Nominal Sensitivity** The 1-meter-referenced SPL produced by a 1 watt band limited pink noise signal, with no processing applied.
- ⁵ **Equalized Sensitivity** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which produces a total power of 1 watt, in sum, to the loudspeaker subsections.
- ⁶ **Equalized Maximum SPL** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which drives at least one subsection to its rated power.
- ⁷ **Resolution** All response graphs are subjected to 1/6 octave cepstral smoothing with a gaussian weighting function.
- ⁸ **Axial Sensitivity** The SPL plotted against frequency for a 1 watt swept sine wave, referenced to 1 m with no signal processing.
- ⁹ **Axial Processed Response** The axial magnitude response with recommended signal processing applied.
- ¹⁰ **Axial Processed Phase Response** The axial phase response with recommended signal processing applied, and latency removed.
- ¹¹ **Horizontal / Vertical Off Axis Responses** The magnitude response at various angles off axis, with recommended signal processing applied.
- ¹² **Beamwidth** The angle between the -6 dB points in a loudspeaker's polar response.
- ¹³ **Directivity Index (Di)** The ratio of the on-axis sound pressure squared to the spherical average of the sound pressure squared at a particular frequency expressed in dB. To convert the directivity index to directivity factor (Q) use the formula $10^{Di/10}$.



fulcrum
ACOUSTIC®

product specification

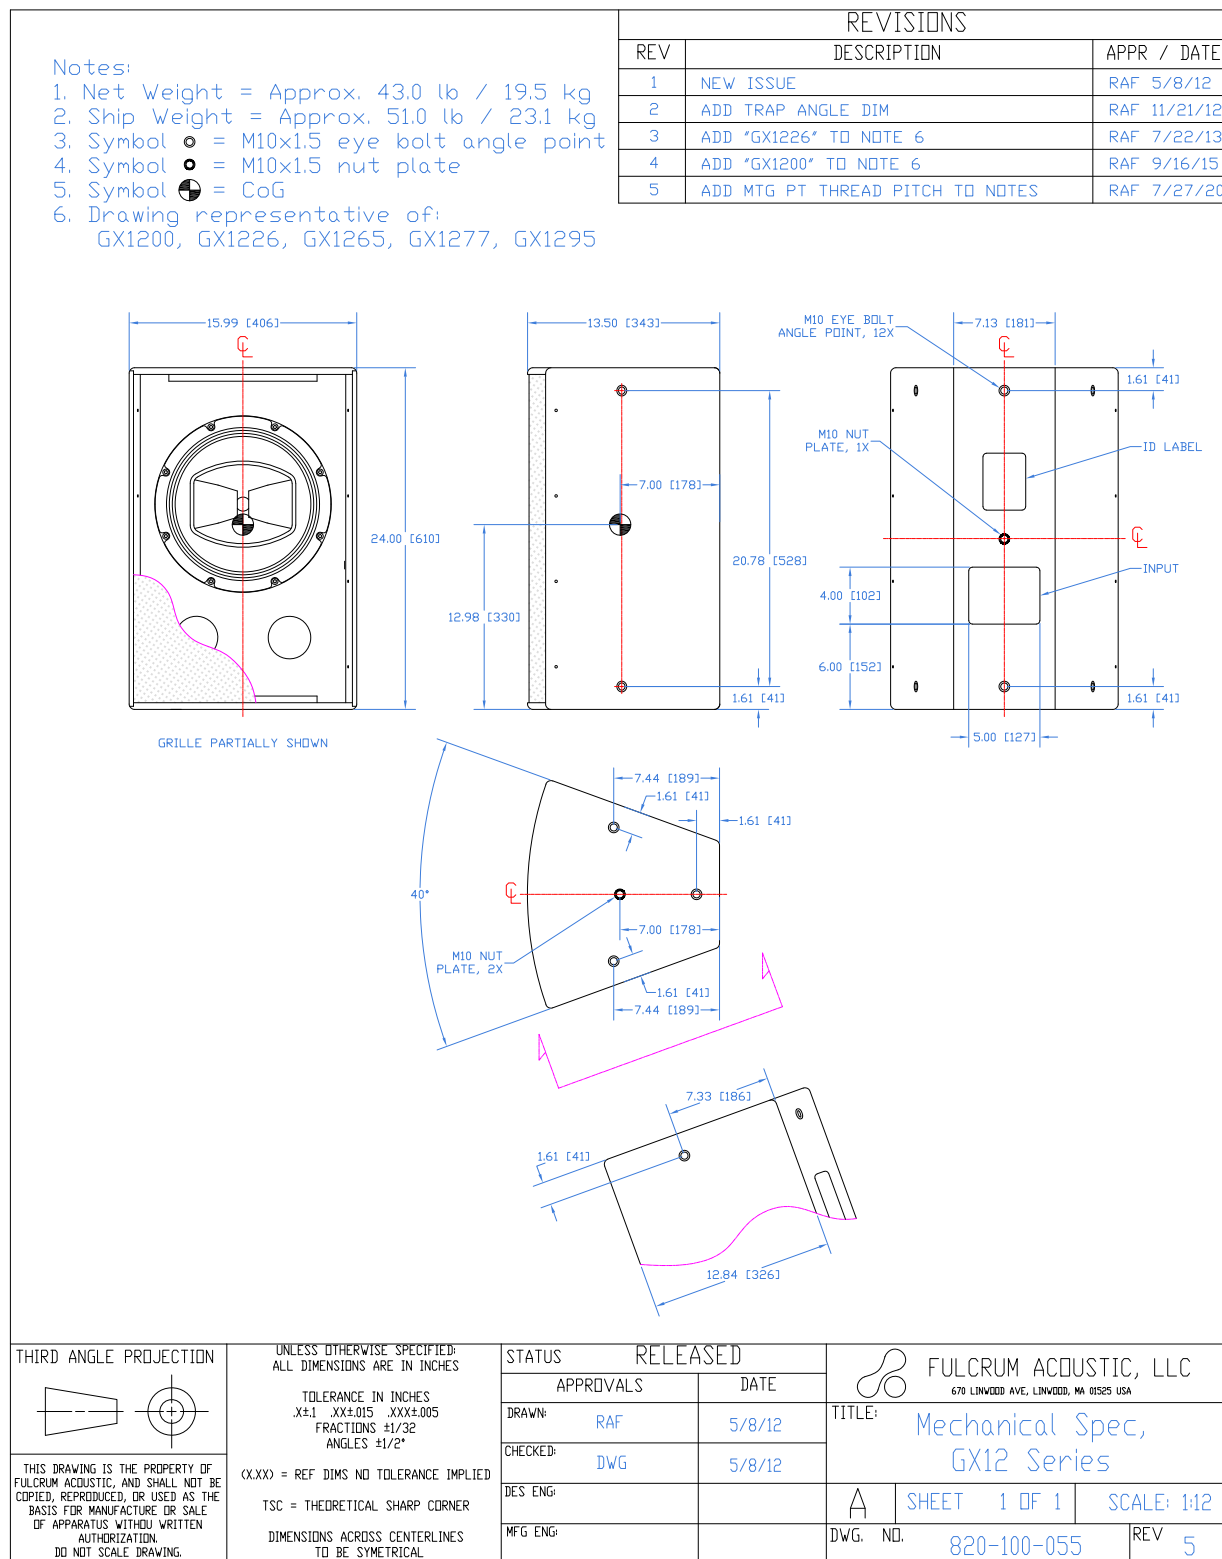

Drawing is reduced. Do not scale.



fulcrum
ACOUSTIC®


product specification, weather-resistant (WR) version


Notes:

1. Net Weight = Approx. 39.4 lb / 17.9 kg
2. Ship Weight = Approx. 46.0 lb / 20.8 kg
3. Symbol = M10x1.5 eye bolt angle point
4. Symbol = M10x1.5 nut plate
5. Symbol = CoG
6. Enclosure construction:
Fiberglass Reinforced Polyurethane
7. Drawing representative of:
GX1200-WR, GX1226-WR, GX1265-WR,
GX1277-WR, GX1295-WR


REVISIONS

REV	DESCRIPTION	APPR / DATE
1	NEW ISSUE	RAF 1/12/16
2	REDRAWN FOR FRP	DEW 4/3/18
3	UPDATE COVER PLATE, ALL DIMS	RAF 7/29/20

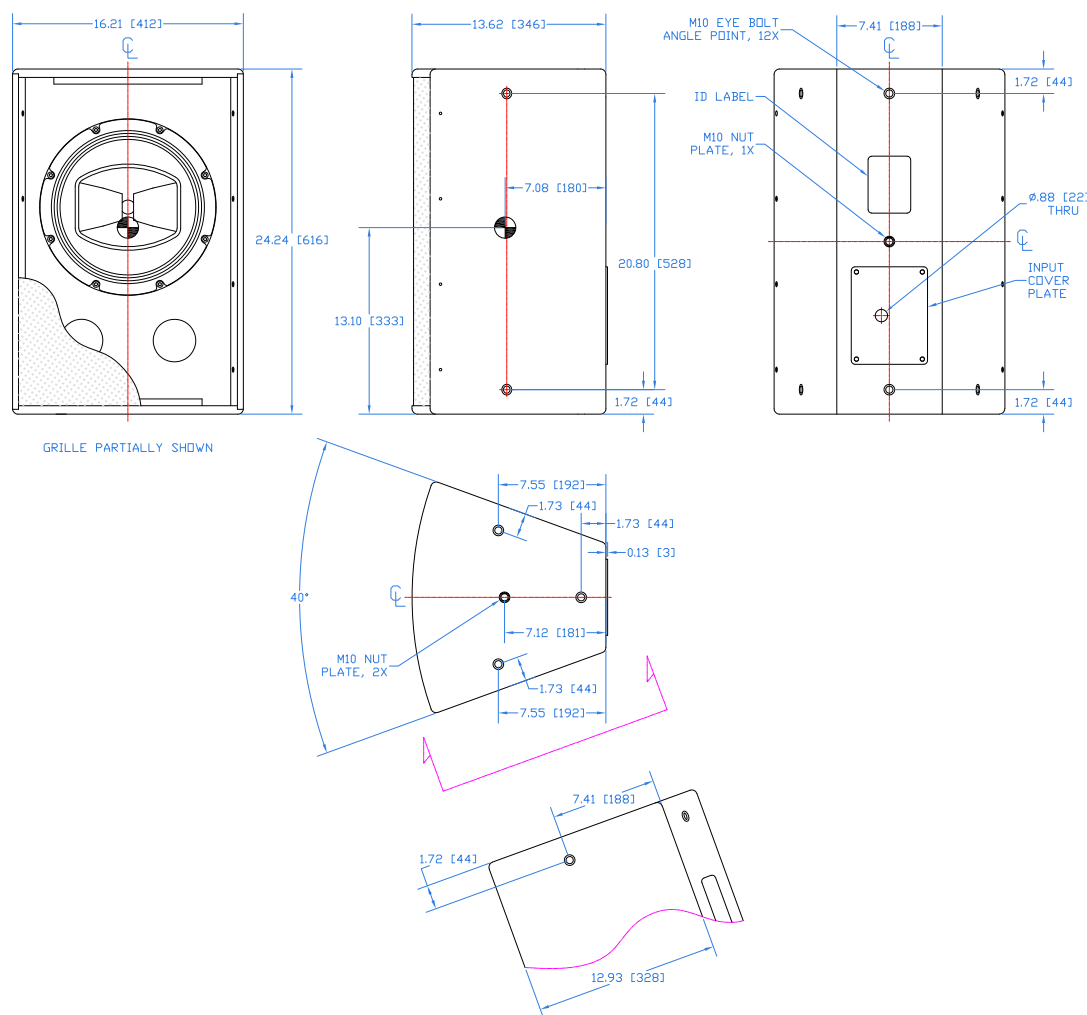


THIRD ANGLE PROJECTION	<div>UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES</div> <div>TOLERANCE IN INCHES .XX±.015 .XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2°</div> <div>(X.XX) = REF DIMS NO TOLERANCE IMPLIED</div> <div>TSC = THEORETICAL SHARP CORNER</div> <div>DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL</div>	STATUS RELEASED		<div> FULCRUM ACOUSTIC, LLC</div> <div>670 LINWOOD AVE, LINWOOD, MA 01525 USA</div>	
		APPROVALS DATE			
DRAWN: RAF		1/12/16	TITLE: Mechanical Spec, GX12 Series - WR		
CHECKED: DWG		1/12/16			
DES ENG:		A	SHEET 1 OF 1	SCALE: 1:12	
MFG ENG:					
THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.		DWG. NO. 820-100-089		REV 3	

Drawing is reduced. Do not scale.

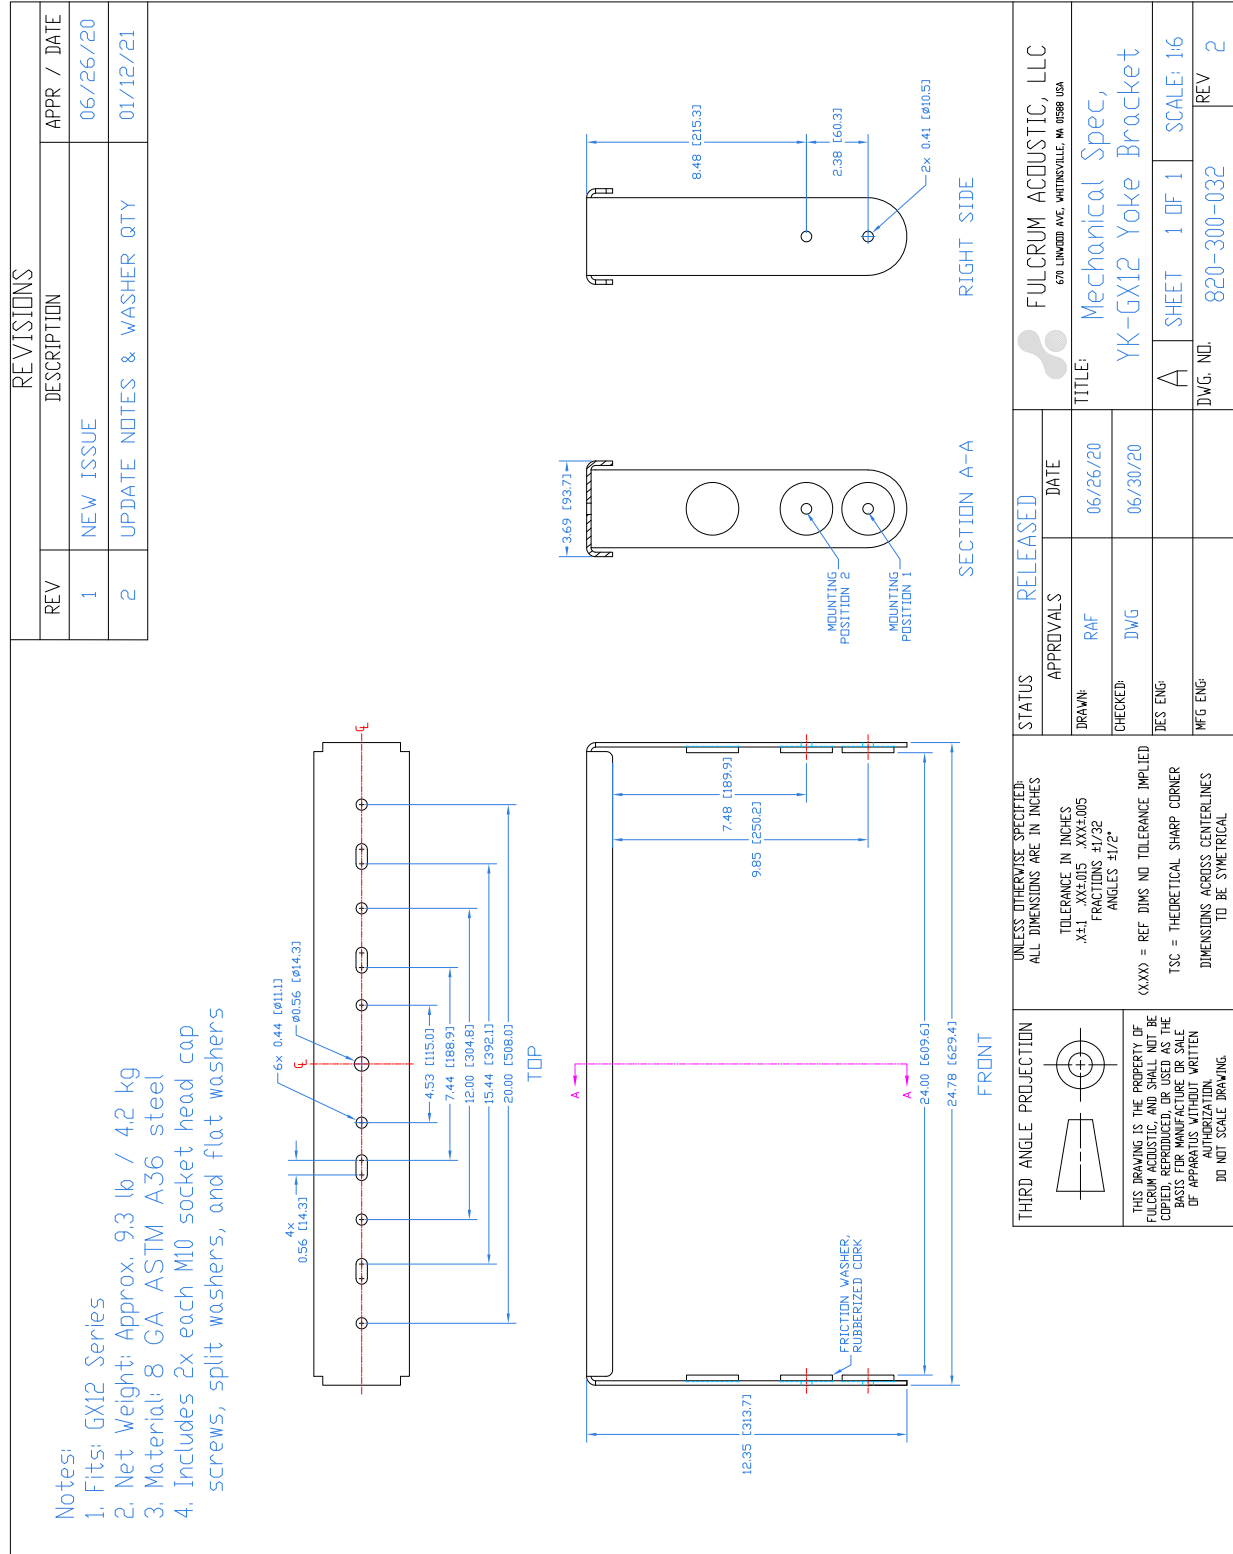

Drawing is reduced. Do not scale.

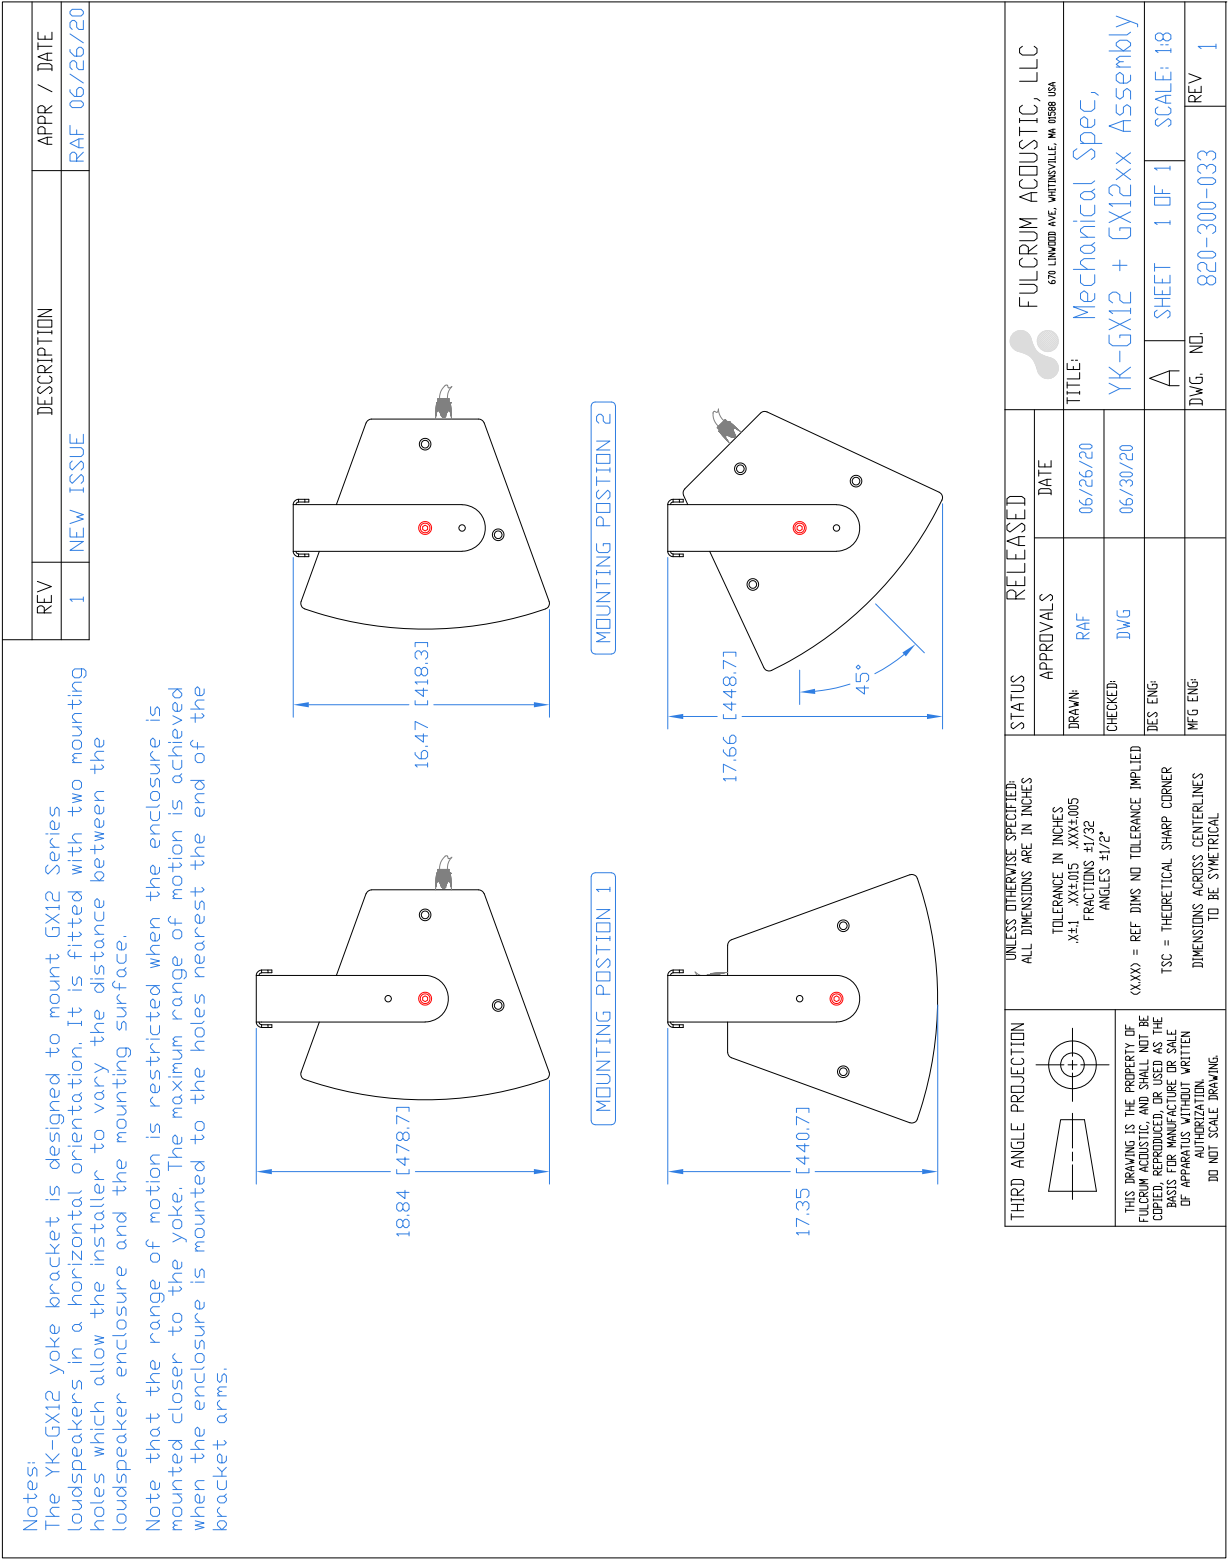

Drawing is reduced. Do not scale.